




GripLock™ End Connectors

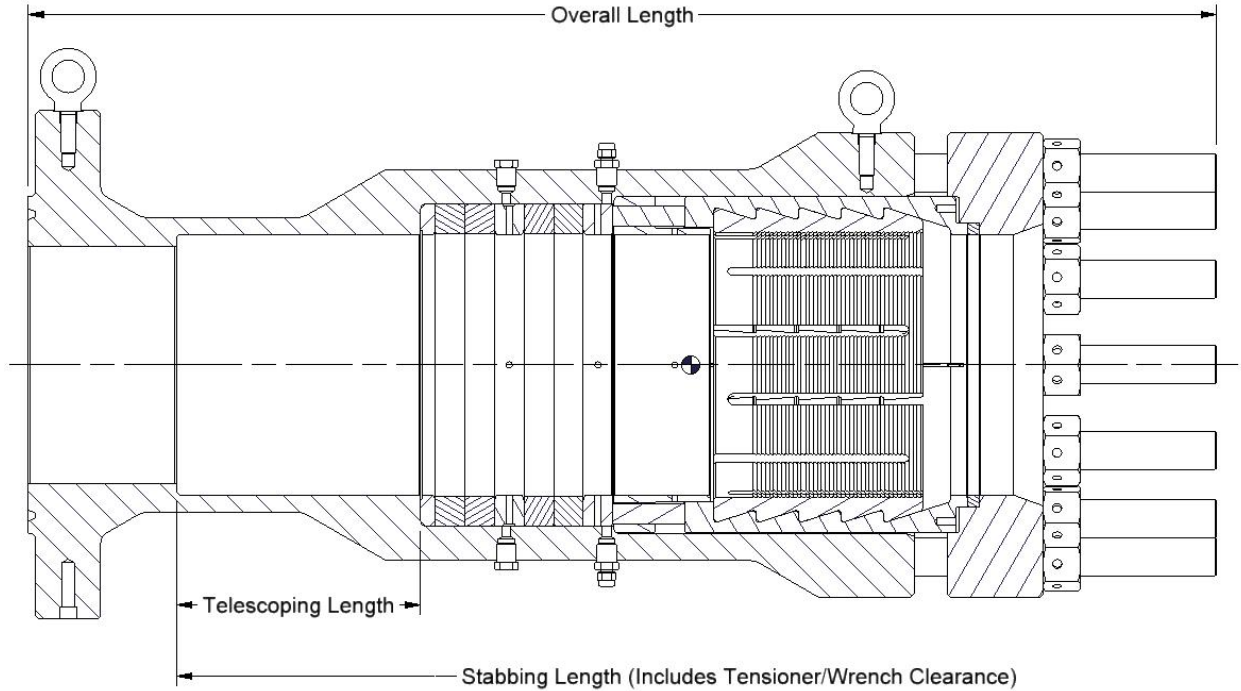

Nom. Size	ANSI Class	Outside Diameter OD (in)	Overall Length OAL (in)	Collet Stud Data		Telescoping Length (in)	Stabbing Length (in)	Weight (lbs)
				Stud Size (in)	Quantity			
3	900	9.50	21.25	7/8 - 9 UNC	10	6	25	160
4	900	11.50	22.16	1-1/4 - 8UN	8	6	27	263
6	900	15.00	27.03	1-1/4 - 8UN	12	6	31	475
8	900	18.50	45.25	1-3/8 - 8UN	14	10.75	46	910
10	900	21.50	50.29	1-5/8 - 8UN	14	10.25	57	1500
12	900	24.00	58.86	2 - 8UN	14	10.25	65	2568
16	900	28.63	68.03	2-1/4 - 8UN	16	11.50	73	4350
20	900	33.75	79.00	2-1/4 - 8UN	18	12	95	6333
24	900	41.00	91.11	2-1/4 - 8UN	22	13	102	10550
30	900	48.50	96.78	2-1/4 - 8UN	24	21	116	12500
36	900	57.50	110.12	2-1/2 - 8UN	28	24	126	18500
2-7/8	5000	9.63	20.83	3/4 - 10UNC	10	5	18.50	153
3-1/2	5000	10.50	22.00	7/8 - 9UNC	8	5.00	19.50	185

*Note: All ANSI 900 Class sizes are available in ANSI 600 Class configurations upon request.
 QCS Stocks GripLocks™ 4" through 24" in the ANSI 900 size range.

**Note: All standard GripLock™ Connectors are Hydrotested to 150% of the MAOP of the Connector.